



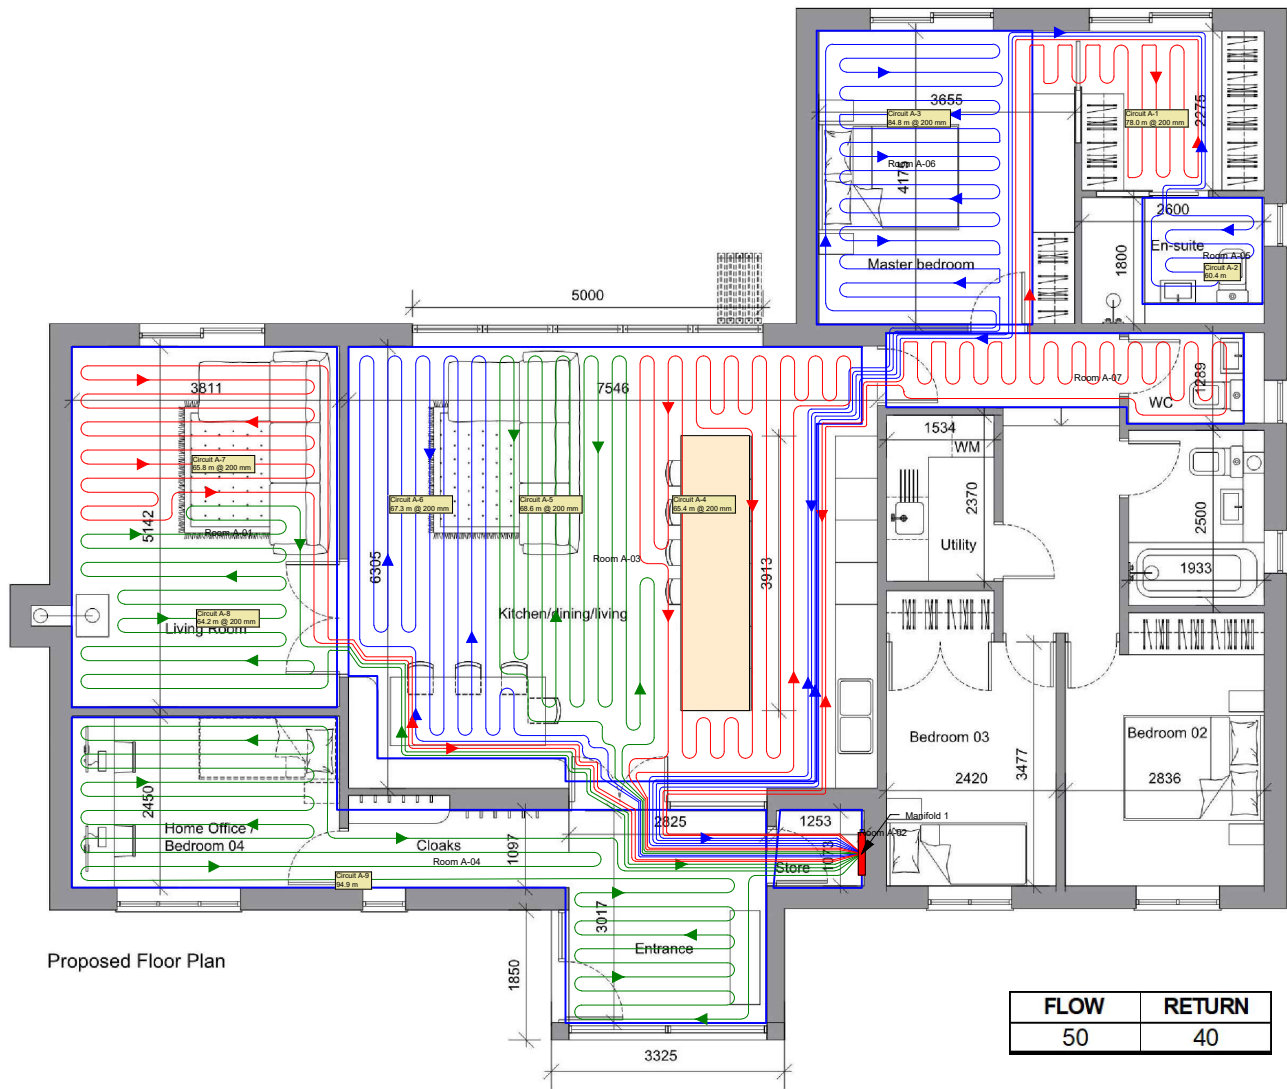

Proposed Floor Plan

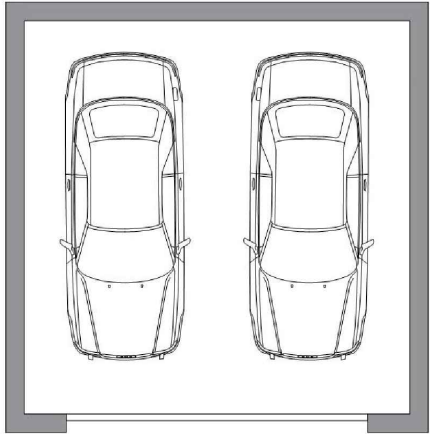

Garage below Bedrooms 03 & 04

LOOP	AREA SERVED	ZONE	PITCH (mm)	LOOP LENGTH (m)	HEAT LOSS (W)	SHORTFALL (W)	FLOW RATE		HEAD LOSS kPa
							(Kg/sec)	(l/min)	
1 / 1	Master / WC/ long hall	1	200	78	627		0.01	0.90	7.19
1 / 2	Ens	2	200	60	212		0.01	0.40	5.50
1 / 3	Master / WC/ long hall	1	200	85	683		0.02	1.00	7.62
1 / 4	Kitchen	3	200	65	691		0.02	1.00	7.01
1 / 5	Kitchen	3	200	69	734		0.02	1.10	7.27
1 / 6	Kitchen	3	200	67	713		0.02	1.10	7.14
1 / 7	Living	4	200	66	442		0.01	0.70	6.27
1 / 8	Living	4	200	65	435		0.01	0.70	6.23
1 / 9	Bed 4 / ent	5	200	95	1053		0.03	1.60	13.46

TOTAL PIPE (m)	650
SYSTEM VOLUME (l)	73.51
FLOW RATE (Kg/sec)	0.13
HEAD LOSS (KpA)	13.46

FLOORING NOTES

HEAT CAN TYPICALLY BE APPLIED TO THE FLOOR SCREED INITIALLY WITH WATER AT 25 degC ON THE FIRST DAY, THEN THE TEMPERATURE CAN BE RAISED BY 3 degC PER DAY UNTIL THE DESIGN TEMPERATURE IS REACHED.

WOODEN FLOORS - PROBES OR REDUCED FLOW RATES CAN BE USED TO AVOID OVERHEATING (FLOOR EXCEEDING 27 DEGREES) WOODEN FLOOR FINISHES. THE SCREED MUST BE FULLY CURED AND THE MOISTURE CONTENT OF THE TIMBER SHOULD BE UNDER 8-9 PERCENT TO MITIGATE RISK OF THE FLOOR WARPING

FAILURE TO COMPLY WITH THESE INSTRUCTIONS COULD RESULT IN DAMAGE TO THE PIPEWORK, SCREED OR FLOOR COVERING.

TILE ADHESIVE MUST CONTAIN A FLEXIBLE LATEX ADMXTURE TO ALLOW MOVEMENT OF TILES DURING THE NORMAL OPERATION OF THE UNDERFLOOR HEATING SYSTEM.

IF CARPET IS TO BE USED AS THE FINAL FLOOR COVERING IT IS IMPORTANT THAT THE THERMAL RESISTANCE OF THE CARPET AND UNDERLAY COMBINATION DOES NOT EXCEED A RATING OF 2.5 TOG.

PRESSURE TESTING SHOULD BE CARRIED AFTER LAYING THE PIPEWORK. ALL UFH PIPE SHOULD BE TESTED BETWEEN 2 AND 3 BAR (AIR) OR BETWEEN 3 AND 6 BAR (WATER) PRIOR TO SCREEDING.

UFH TECHNICAL NOTES

IN THE ABSENCE OF HEAT LOSSES BEING PROVIDED, AN ASSUMED REQUIREMENT OF 45W/SQM WILL BE USED FOR NEW BUILD SITES.

PIPE LENGTHS ARE APPROXIMATE AND TO BE USED AS INSTALL GUIDANCE

IF NO TOG VALUES/ FLOOR FINISH DETAILS ARE PROVIDED, SYSTEM WILL BE DESIGNED ON AN ASSUMED 1 TOG RESISTANCE VALUE THROUGHOUT

THE UFH PIPE LAYOUT SHOWN IS INDICATIVE AND FIXTURES AND FITTINGS MUST BE NEGOTIATED ON SITE. THE ESTIMATES ON OUTPUT ARE FROM PIPE SPACING ACROSS THE AVAILABLE AREA - DESIGNED TO BS EN1264-2

OUTPUTS WILL BE BASED ON ROOM TEMPERATURES AS PER THE CIBSE GUIDANCE TYPICALLY 21 DEGREES TO ALL ROOMS, WITH BATHROOM AND SHOWER 22 DEGREES

APPROVAL OF THIS DRAWING IS REQUIRED PRIOR TO INSTALL, IF THIS IS NOT RECEIVED THEN THE DRAWING IS ASSUMED TO BE APPROVED

THE UNDERFLOOR HEATING PIPEWORK SHOULD NOT BE LAID WITH AN AMBIENT TEMPERATURE OF BELOW 0 degC.

THIS DRAWING IS INTENDED FOR INSTALLATION PURPOSES ONLY, ANY ALTERATIONS MUST BE NOTIFIED TO ALD GROUP

DESIGN STATUS: AWAITING APPROVAL

SITE:
Ellesmere

SCALE: 1:100 @A3

DATE: 13.06.2024
REVISION